

fermob



LIGHTING TECHNICAL BOOKLET - 2024

COLOURS

		A5 - Clay Grey	C7 - Lapilli Grey	47 - Anthracite	42 - Liquorice	92 - Deep Blue	21 - Acapulco Blue	02 - Cedar Green	82 - Cactus	14 - Nutmeg	B9 - Black Cherry	20 - Red Ochre	67 - Poppy	C6 / 73 - Honey
APLÔ	Lamp H.24													
	Wall light bracket													
	Suspension trap													
	Magnetic base													
	Upright stand	NEW												
BALAD	Set of 3 lamps H.12													
	Lamp H.25													
	Lamp H.38													
	Upright stand													
	Offset stand													
	Spike stand													
HOOPIK	String lights L I 200 Type E & F													
	String lights L I 200 Type I													
	String lights L I 200 Type J													
	Lamp Ø 24	NEW												
INOUI	Lighting stool H.44													
LUDO	Smart switch													
MOON!	Wall light Ø 15													
	Lamp H.41													
	Lamp H.41 MAX													
	Lamp H.63													
	Lamp H.134													
	Triple pendant lights Ø 15	NEW												
OTO	Pendant lights Ø 25	NEW												
	Lamp H.27	NEW												
	Lamp H.30	NEW												

PRODUCTS

PORTABLE LAMPS



APLÔ
3410
P.16



BALAD
3602
P.20



BALAD
3612
P.20



BALAD
3622
P.21



BALAD BAMBOO
365100
P.24



BALAD BAMBOO
365200
P.24



BALAD BAMBOO
365300
P.25



ULLI
3810
P.44

NEW

TABLE LAMPS



APLÔ
3450
P.18



MOOON!
5303
P.34



MOOON!
5304
P.34



OTO
3960
P.42



HOOPIK
3510
P.30

NEW

NEW


FLOOR LAMPS



BALAD
3632
P.22



BALAD
3631
P.22



BALAD
3630
P.22



APLÔ
3480
P.18

NEW



MOOON!
5320
P.36



MOOON!
5310
P.37



WALL LIGHTS



APLÔ
3460
P.18



MOOON!
5330
P.38



PENDANT LIGHTS & STRING LIGHTS



APLÔ
3470
P.18



HOOPIK
3501/3502/3503
P.28



MOOON!
5350
P.40

NEW



MOOON!
5340
P.40

NEW



ILLUMINATED FURNITURE



INOUI
3304
P.32



To turn your smart lights
on remotely



LUDO
3390
P.33




APPLICATION
FERMOB LIGHTING
P.27

FERMOB, LEADING BRAND FOR LIGHTING

DECORATIVE, AUTONOMOUS, INDOOR & OUTDOOR

A STORY FULL OF PROGRESS

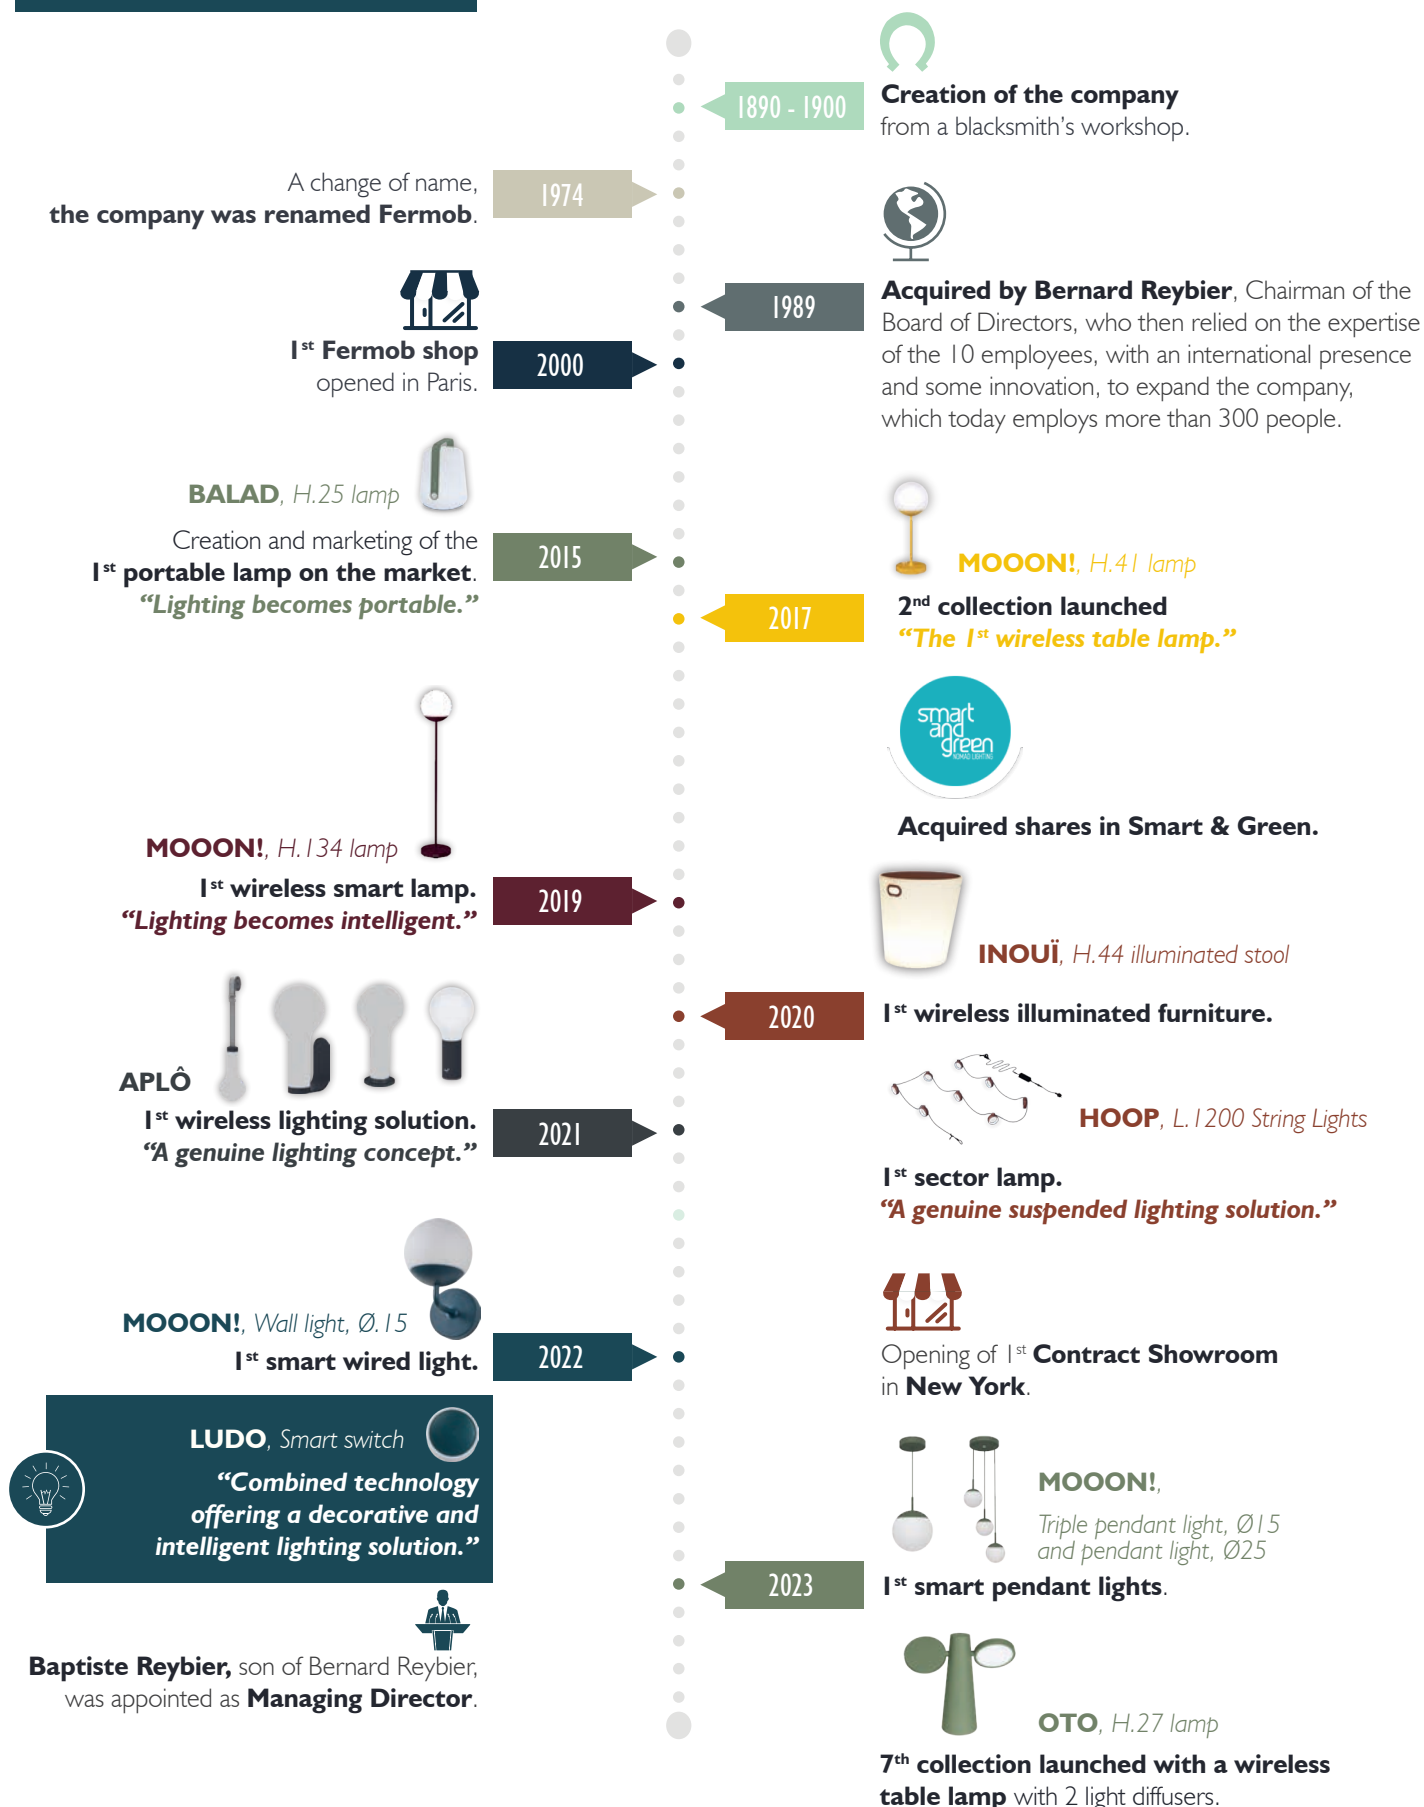

INNOVATION FIRST...

CREATION

Apart from quality, **design is a major commitment for Fermob**. With an approach **inspired by changing lifestyles** and history, the products also combine Fermob's **commitments to simplicity, a feeling for detail and, of course, aesthetics**. As well as forming part of our **overall design vision**, the collections are also in step with our observations of **new uses**. Fermob offers a variety of products (table lamps, pendant lights, wall lights, etc.) for a range of lighting scenarios (with different light temperatures, intensities, etc.).

DESIGN

Our development protocol takes everything into account: ergonomics, weight, ease of handling and sturdiness. The result is a product that is built to last & brings genuine delight. Fermob approaches new product developments with a manufacturer's eye, putting together its own know-how and connecting with the best partners for growth.

To support its growth in the lighting market, Fermob set up a **dedicated working group to combine different areas of expertise**. The brand also partnered up with **Smart & Green**, a start-up in Grenoble **specialising in development of portable and smart LED lights** (using Bluetooth 4.0 Smartmesh® technology).



PRODUCTION

Production is entrusted to the **IPW industrial group** created by a joint French and Chinese team, and working closely with Fermob teams. **Specialising in plastic injection and electronics**, IPW develops LED lighting control software and systems.



Innovative products that are affordable and accessible in terms of price point and ease of use, with strong environmental credentials (eco-designed, able to be taken apart, and energy efficient, due to use of LEDs)



FERMOB : A UNIQUE KNOW-HOW IN METAL AND COLOUR

THE METAL: WONDERFUL MATERIAL OF IDEAS

We choose to use **metal** (over 98% recyclable) – the **“material of ideas”**, as Gustave Eiffel put it – on account of its incredible versatility. The metals we use are **premium-grade steel and aluminium**.



STEEL

- Fermob's original expertise
- Stable and durable
- Creates an elegant design



ALUMINIUM

- Malleable
- Light-weight
- Easy to weld

Whenever our designers and technicians are working on a new product, **anti-corrosion performance is always top of mind**. We're constantly thinking of ways to eradicate, or at least reduce, areas that could be prone to corrosion because they are not protected or treated.

A COLOUR CHART WITH EXCLUSIVE COLOURS

Since 1996, **colour has been one of the strongest features of the Fermob brand**. Bernard Reybier was quick to understand how colour makes a garden stand out, gives atmosphere to a terrace, brings **character to a product and introduces a breath of fresh air...**

The brand has livened up the outdoor market by offering an **original colour chart of bright, rich and contrasting shades**. Today, Fermob is developing its **colour expertise** with **more subtle tones** allowing customers to **play with shades**.

The lighting products colour chart has been designed to work **equally well indoors and outdoors**.

All Fermob metal products are painted with a **100% polyester powder coating** which has higher **UV resistance** than the epoxy paints generally available on the market. Paint is applied **electrostatically for optimal coverage**, then the product is baked at a very high temperature.

The colours are designed for **demanding outdoor use**. Intensive testing is performed before each launch to guarantee:

- **long-lasting colour,**
- **scratch resistance,**
- **UV resistance,**
- **moisture resistance.**



FERMOB: A UNIQUE LIGHTING IDENTITY

Fermob lighting builds on the **fundamentals of the brand: ease of use, versatility, continuous innovation, a design approach**. Fermob, in tune with contemporary living, offers a **variety of products for a range of lighting scenarios** (with different light temperatures, intensities, etc.) & different accessories for **a unique user experience, just right for every different moment of life**.

Whether wired or wireless, all Fermob lighting products have something in common - **their simplicity and versatility in use**. Designed for **your table or floor, or to be portable or wall-mounted** Fermob lights offer **complementarity in use**: creating ambience at the table, lighting a bar space, highlighting a poolside area, marking out a path, etc.



A perfect combo for unique user experiences, just right for every different moment of life.

MAKE A LASTING IMPRESSION,

BUT NOT ON THE ENVIRONMENT!



Our eco-design approach improves the **sustainability of our products at every stage of their life cycle**. Our material selection policy, manufacturing processes and design choices work together to enhance the repairability and recyclability of our lights.

95% of Fermob's lighting products can now be taken apart, repaired and recycled!

INTERNAL INDICATORS TO PROMOTE THE REPAIRABILITY & RECYCLABILITY OF OUR PRODUCTS

To demonstrate its commitment to long-lasting lights, the brand has developed two additional indexes that are specific to Fermob:

- The IREP repairability index
- The IRCY recyclability index

These indexes, which have been part of the design process of our lights since 2019, are intended to evaluate our virtuous approach to product lifespan, while preserving our head start in the fields of repairability and recyclability.



The repairability index (IREP) was the first to be formalised after discussions were initiated in 2018. It assesses the repairability performance of our lights, which depends on a combination of three factors: **how easily they can be taken apart, availability of spare parts, and the degree of technical expertise required for the repair.**

It enables each of our lighting products to be graded on a scale from 0 to 2:



Cannot be repaired



Can be repaired by a professional with access to specific tools



Can be easily repaired by private individuals using simple tools (e.g., screwdriver)



The recyclability index (IRCY) measures the recycling potential of products at the end of their lives. It considers **the type of materials used to make the product, the presence or absence of recycling obstacles** (ease of material separation, electrical or electronic components, etc.), and the **maturity of the recycling processes.**

The classification thus comprises 3 categories, represented by a specific colour code:



Non-recyclable



Mostly recyclable



Totally recyclable

In the context of this continuous improvement initiative, these indexes, proactively created by Fermob, are designed to evolve. They will be adapted as the months go by to include increasingly precise score criteria.

SELECTION OF ECO-RESPONSIBLE MATERIALS AND COMPONENTS

All of our lighting products have to meet several rigorous criteria from design through to production. Fermob guarantees good quality products:

- Selection of **premium quality materials** and **electrical components** (aluminium, polyethylene, LED, glass, etc.),
- Use of materials that are known for their **resistance to OUTDOOR conditions**, procured from suppliers with a good reputation at international level,
- 100% polyester powder coating **with UV resistance**,
- A **dedicated quality team**.



All our lighting is certified in a 2-stage procedure:

- The product design work includes performance of several tests in accordance with IEC 60598, testing component strength and uses (e.g. NF EN 60529, etc.)



IEC 60598: The international standard, for all lighting that incorporates electric light sources, which specifies general requirements for operation at power supply voltages up to 1000 V. The requirements and the corresponding tests for this standard are concerned with classification, marking and mechanical and electrical construction.



LED

Recyclable and far more **environmentally-friendly** than all other types of lighting. They offer a long life span, with 85% lower energy consumption **and no toxic mercury content**.



DURABLE AND RECYCLABLE HIGH-PERFORMANCE ELECTRONIC AND ELECTRICAL COMPONENTS

E.g. battery and LED PCB module
(PCB: Printed Circuit Board)



LOW ENVIRONMENTAL IMPACT PAINT

Better for the environment and for **our health**. The powder coatings used by Fermob are **solvent-free**. They are used in a **zero waste system** and are guaranteed for outdoor use.



METAL

A sustainable material.
Iron and aluminium are **98% recyclable** materials, and have the benefit of a mature value chain at international level.



POLYETHYLENE OR POLYCARBONATE DIFFUSER

Very strong materials, with the benefit of being **recyclable even after being recycled**.



GLASS DIFFUSER









A material that has the benefit of being **85% recyclable**.

DISASSEMBLING LIGHTING TO IMPROVE LIFE SPAN

Fermob **considers the design** of its lighting products to **make them easier to disassemble** and **to extend their life span**. Several components can be replaced (see detailed list on p.44 and in Price list).

Each package is marked with **repairability symbols** indicating the **type of disassembly** (requiring a professional or able to be completed by user) and specifying the **type of repairability** (light source and/or control unit).

Detailed key to repairability symbols:

	Light source can be replaced by a professional		Light source can be replaced by user
	Light source (LED only) can be replaced by a professional		Light source (LED only) can be replaced by user
	Control device can be replaced by a professional		Control device can be replaced by user
	Light source cannot be replaced		Control device cannot be replaced

Thus, in line with our IREP index, various “product repairability” videos are proposed via our online sales sites, to simplify the experience of users wanting to repair their Fermob lights.

Since 1 September 2021, in accordance with the requirements of the European energy labelling regulation:

- the new labelling of all household appliances, light sources and lighting products (Light output ≥ 60 lm)
- the new method for analysing energy consumption.

Repairability symbols



QR code giving access to the European database for energy labelling - EPREL.

It fills in the technical information & details (materials, dimensions, energy class, etc.).

WHERE CAN I DISPOSE OF A USED LIGHT?

When disposing of a **used lighting product**, it is mandatory to **disassemble your light and place it at an authorised collection site**. The instructions and packaging give the user information, by means of regulated markings, to ensure that the materials can be recycled or recovered at the end of their life.



Manufacturers and users have **obligations in terms of management of Waste Electrical and Electronic Equipment (WEEE)**. This symbol indicates that the lighting products must not be put in bins intended for household waste.



AT WASTE CENTRES

These sites, generally managed by local authorities, take your used products and transfer them to the appropriate processing systems.



AT SHOPS

Stores that sell these lighting products are obliged to take back the used products, whether they are small independent traders or large specialist shops.

Fermob

AT THE MANUFACTURER'S PREMISES

Manufacturers take back the used products and transfer them to the appropriate processing systems.



Fermob is **affiliated with ECOSYSTEM** for **processing of waste electrical and electronic equipment** and with **Screlec** for **recycling of batteries**, the latter since the start of the Lighting product collections.

ecosystem
recycler c'est protéger

screlec
ensemble vers une économie circulaire

In compliance with France's AGECL law of 10 February 2020 (anti-waste law to promote the circular economy), we use the TRIMAN system on our labels to inform consumers of the waste sorting rules concerning our furniture, its packaging and documentation. The TRIMAN logo comes with an information box indicating the sorting or waste disposal instructions for the various elements.



FERMOB CONTRACT

A DEDICATED DEPARTMENT FOR PROFESSIONAL PROJECTS

Professional living spaces serve as showcases for both private and public establishments, so they need to be **engaging and personalised** to create **interior and exterior spaces** that represent them, in a unique style.



A DEDICATED TEAM FOR YOUR PROJECTS

In order to coordinate our activity and offer the highest level of service, there is a **team of 30 people within the Contract department, ready to dedicate themselves exclusively to consultancy and professional projects.**

Their main roles are:

- Design consultancy,
- Preparation of 2D/3D plans,
- Provision of 3D files for PCON modelling,
- Creation of special products,
- Provision of samples,
- Implementation of bespoke services.

*"We can come to you and visit your site
or welcome you to one of our showrooms."*



BESPOKE PROJECTS: BE UNIQUE!

Our Bespoke Projects department is available to you, ready to offer you the products to fulfil your **specific requirements in terms of your brand identity** (charter, logo, etc.), and **specific functional requirements** or **custom design**.

- **Marking:** different types of marking with a logo, a short text or an image, either by laser cutting or by screen printing on metal or polyethylene.
- **Special colours:** RAL, RAL DESIGN (used for finer distinctions between colours) or other colours on request.
- **Packaging:** custom graphics



Veuve Clicquot by Fermob

- RAL Special
- Individual packaging of H12, screen printing, and special packaging

SPECIAL OPTIONS	RAL on metal	Cable colours	Screen printing on metal	Screen printing on diffuser	Cable length	Packaging	Laser cutting	Ground Mount	Packaging
APLÔ									
H24 lamp	x		x			x			x
Magnetic base	x					x			x
Wall light bracket	x					x			x
Hanging strap	x	x				x			x
Upright stand	x		To be confirmed					To be confirmed	
BALAD									
H12 lamp	x		x	To be confirmed		x			x
H12 Bamboo lamp			x	To be confirmed		x			x
H25 lamp	x		x	To be confirmed		x			x
H25 Bamboo lamp			x	To be confirmed		x			x
H38 lamp	x		x	To be confirmed		x			x
H38 Bamboo lamp			x	To be confirmed		x			x
Spike stand	x		x						
Upright stand	x		x					x	
Offset stand	x		x					x	
HOPIK									
L1200 String Lights						x			
Ø24 lamp	x					x			x
INOUI									
H44 lighting stool	x		x			x	x		x
LUDO									
Smart switch	x					x			x
MOON!									
H41 lamp	x		x			x			x
H41 MAX lamp	x		x			x			x
H63 lamp	x		x			x			x
H134 lamp	x		x			x			x
Triple pendant light, Ø15	x	x			x	x			x
Pendant light, Ø25	x	x			x	x			x
Wall light Ø15	x					x			x
OTO									
H27 lamp	x					x			x
ULLI									
H30 lamp	x					x			x

Prices & Delivery times vary depending on season & quantity - Contact us for more information.

GLOSSARY

ABS

Acrylonitrile Butadiene Styrene (ABS) is a relatively rigid, lightweight, impact-resistant and mouldable thermoplastic polymer (a type of styrenic polymer, to be exact).

BYPASS

A bypass is a circuit that avoids a device or system.

BATTERY USE CYCLES

The battery's capacity gradually decreases with the use of the light. This is a natural phenomenon. A use cycle includes a complete discharge and recharge of the battery (if the battery is discharged to 50% and then recharged to 100%, this is equivalent to 1/2 cycles). On average, Fermob lights vary between 300 and 500 cycles of use per battery.

LUMINOUS FLUX - LUMEN (Lm)

In photometry, luminous flux is a measure of the power of a light source as perceived by the human eye. It's the most commonly used indicator of the total amount of light emitted by a light source in all directions.

IK INDEX

Defines the strength of a device against knocks and impacts, but not against falls. The test is carried out with a steel vertical or pendulum hammer. The rating ranges from 0 to 10 (according to standard NF 62262).

IP INDEX


Defines the degree of protection provided by the equipment against the penetration of solid matter (first figure) and liquid matter (second figure). The rating ranges from 00 to 68 (according to standard NF EN 60529).

POLYETHYLENE

Polyethylene is one of the most common thermoplastic resins in use today. It is known for its excellent impact resistance.

COLOUR TEMPERATURE - KELVIN (°K)

Measures the colour temperature of the light. It indicates whether white light is warm (yellow hue) or cool (blue hue). It varies depending on the source. The higher this figure, the more bluish-white the colour temperature, while light with a lower colour temperature tends towards the red end of the scale.

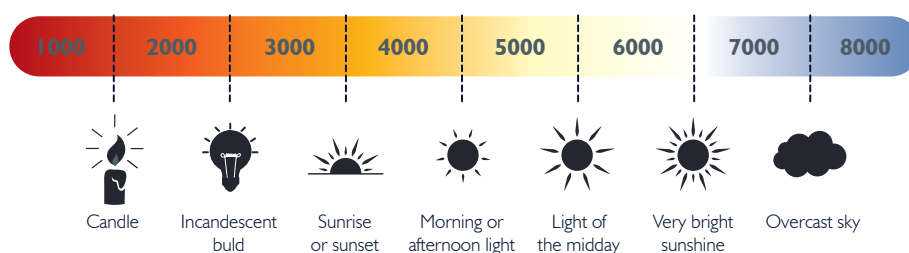

ALTER THE COLOUR TEMPERATURE TO CREATE THE RIGHT LIGHTING MOOD.

This feature lets you adjust the colour temperature to the task at hand. Warm white (2,700 to 3,300°K) creates a comfortable mood that's perfect for relaxing. Neutral white (4,200 to 4,500°K) is more soothing and energising. Cool white (5,500 to 6,500°K) is closest to natural daylight, with a slightly blue hue that boosts focus and concentration.

THE PRODUCT DESCRIPTION

SYMBOLS

RECOMMENDED USE



IPAC



REPAIRABILITY & RECYCLABILITY INDEX




COLOURS



FURNITURE CHARACTERISTICS



LIGHT CHARACTERISTICS



3410 - LAMP H.24 CM
DESIGN BY TRISTAN LOHNER

DOMESTIC | PROFESSIONAL | INTENSIVE

2
IREP

IRCY

8



Polyethylene diffuser

Aluminum frame

ABS base

Technology: integrated LED - Luminous flux: 70 lm

Switch type : push button

Function of the switch: change the light temperature (long click, 3 s),
change the brightness (short click, 1 s)

Lighting mood:

Position 1 cool white (6000°K) 100% brightness

Position 2 cool white (6000°K) 50% brightness

Position 3 warm white (3000°K) 100% brightness

Position 4 warm white (3000°K) 50% brightness

Type of power supply: battery - Min. Battery life (100%): 7 h

Battery use cycle: 300 cycles

Recharge time: 3h - Type of recharge: USB, cable (supplied) 1m

Bypass to prevent battery damage during wired use

0.5 A - 5 V - 0.5 W - IP54 (ingress protection) | IK 10 (impact resistance) | CE | FCC | UKCA

Energy rating: F

Powered by Smart & Green


Compatible with:

WALL LIGHT BRACKET - APLÔ

SUSPENSION STRAP - APLÔ

MAGNETIC BASE - APLÔ

UPRIGHT STAND - APLÔ



0.37 kg

341014 ● Nutmeg
341020 ● Red Ochre
341021 ● Acapulco Blue
341047 ● Anthracite

341073 ● Honey
341082 ● Cactus
3410B9 ● Black Cherry
3410A5 ● Clay Grey






aplô

**MUCH MORE THAN JUST A COLLECTION,
A REAL LIGHTING CONCEPT !**

With its **clever accessories**, the H.24 Aplô lamp offers a **multitude of lighting solutions**, both indoors and outdoors.

This **wireless LED lamp**, with its clear-cut design, is a concentrate of knowhow: it meets standards of solidity and resistance to outdoor conditions, it's fast charging, and has a long autonomy, with multi-temperature and intensity light power.

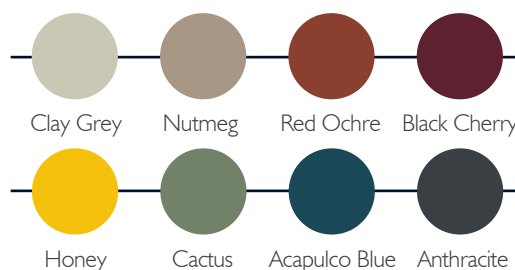


PORTABLE LAMP



TABLE LAMP




WALL LAMP



HANGING LAMP



READING LAMP

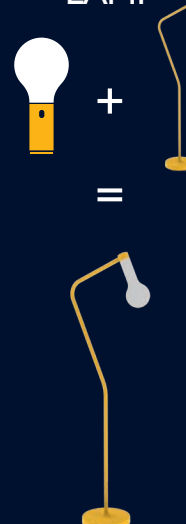

APLÔ IS A **SMART AND MOBILE**
LIGHTING SOLUTION
THAT MEETS ALL THE NEEDS OF EVERYDAY LIFE!

Watch
our video



APLÔ

3480 - UPRIGHT STAND
DESIGN BY TRISTAN LOHNER



Aluminium frame
ABS base
Compatible product fastening type: screwed to the lamp base thanks to a quarter-turn system
Compatible with:
LAMP H24 - APLÔ

348021 ● Acapulco Blue
348047 ● Anthracite
348082 ● Cactus

3480C6 ● Honey
3480B9 ● Black Cherry
3480A5 ● Clay Grey



Watch our video




3450 - MAGNETIC BASE
DESIGN BY TRISTAN LOHNER



Aluminium frame
ABS base
Compatible product fastening type: screwed to the lamp base thanks to a quarter-turn system
Compatible with:
LAMP H24 - APLÔ

345014 ● Nutmeg
345020 ● Red Ochre
345021 ● Acapulco Blue
345047 ● Anthracite

345073 ● Honey
345082 ● Cactus
3450B9 ● Black Cherry
3450A5 ● Clay Grey



0.072 kg


3460 - WALL LIGHT BRACKET
DESIGN BY TRISTAN LOHNER



Aluminium frame
Compatible product fastening type: screwed to the lamp base thanks to a quarter-turn system
Type of fastening: adhesive (double-sided, included) or screw-in (screws not included) wall bracket
Compatible with:
LAMP H24 - APLÔ

346014 ● Nutmeg
346020 ● Red Ochre
346021 ● Acapulco Blue
346047 ● Anthracite

346073 ● Honey
346082 ● Cactus
3460B9 ● Black Cherry
3460A5 ● Clay Grey



0.13 kg

3470 - SUSPENSION STRAP
DESIGN BY TRISTAN LOHNER




Aluminium frame
Compatible product fastening type: screwed to the lamp base thanks to a quarter-turn system
Polyester strap (grey), with polyamide adjustment loop
Compatible with:
LAMP H24 - APLÔ

347020 ● Red Ochre
347014 ● Nutmeg
347021 ● Acapulco Blue
347047 ● Anthracite

347073 ● Honey
347082 ● Cactus
3470B9 ● Black Cherry
3470A5 ● Clay Grey



0.06 kg

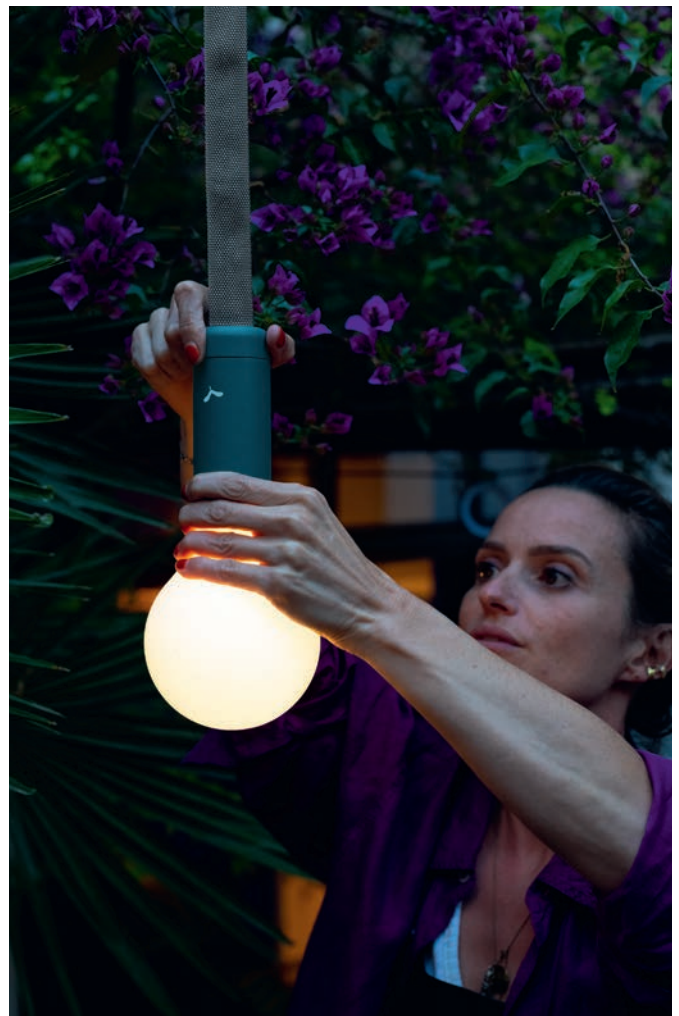

LIGHTING

BALAD

3602 - SET OF 3 LAMPS H.12 CM

DESIGN BY TRISTAN LOHNER

DOMESTIC | PROFESSIONAL | INTENSIVE

2
IREP

IRCY



Polyethylene diffuser

Aluminium frame

ABS base

Technology: integrated LED - Luminous flux: 20 lm

Switch type: push button

Function of the switch: change the light temperature & brightness (short click, 1 s), OFF (long click, 3 s)

Lighting mood:

Position 1 cool white (6000°K) 100% brightness

Position 2 neutral white (4000°K) 100% brightness

Position 3 candle-style warm white (2300°K) flickering

Type of power supply: battery - Min. Battery life (100%): 10 h


Battery use cycle: 500 cycles

Recharge time: 4h - Type of recharge: USB, cable (supplied) 1,5m

Bypass to prevent battery damage during wired use

0.25 A - 5 V - 0.3 W | IP44 (ingress protection) | IK 10 (impact resistance) | CE | FCC | UKCA

Powered by Smart & Green



0.15 kg

360282 ● Cactus
360214 ● Nutmeg
360273 ● Honey
360247 ● Anthracite

360221 ● Acapulco Blue
360220 ● Red Ochre
3602B9 ● Black Cherry
3602A5 ● Clay Grey

3612 - LAMP H.25 CM

DESIGN BY TRISTAN LOHNER

DOMESTIC | PROFESSIONAL | INTENSIVE

2
IREP

IRCY



Polyethylene diffuser

Aluminium frame

ABS base

Technology: integrated LED - Luminous flux: 40 lm

Switch type: push button

Function of the switch: change the light temperature & brightness (short click, 1 s), OFF (long click, 3 s)

Lighting mood:

Position 1 cool white (6000°K) 100% brightness

Position 2 neutral white (4000°K) 100% brightness

Position 3 neutral white (4000°K) 50% brightness

Position 4 candle-style warm white (2300°K) flickering

Type of power supply: battery - Min. Battery life (100%): 7 h


Battery use cycle: 300 cycles

Recharge time: 5h - Type of recharge: USB, cable (supplied) 2m

Bypass to prevent battery damage during wired use

0.5 A - 5 V - 0.5 W | IP44 (ingress protection) | IK 10 (impact resistance) | CE | FCC | UKCA

Powered by Smart & Green



0.53 kg

361282 ● Cactus
361273 ● Honey
361247 ● Anthracite

361221 ● Acapulco Blue
3612B9 ● Black Cherry
3612A5 ● Clay Grey

BALAD

3622 - LAMP H.38 CM
DESIGN BY TRISTAN LOHNER

DOMESTIC PROFESSIONAL INTENSIVE

2
IREP

IRCY

7



Polyethylene diffuser

Aluminium frame

ABS base

Technology: integrated LED - Luminous flux: 150 lm

Switch type: push button

Function of the switch: change the light temperature & brightness
(short click, 1 s), OFF (long click, 3 s)

Lighting mood:

Position 1 cool white (6000°K) 100% brightness

Position 2 cool white (6000°K) 50% brightness

Position 3 neutral white (4000°K) 100% brightness

Position 4 neutral white (4000°K) 50% brightness

Position 5 candle-style warm white (2300°K) flickering

Type of power supply: battery - Min. Battery life (100%) 9 h

Battery use cycle: 300 cycles


Recharge time: 7h - Type of recharge: USB, cable (supplied) 2m

Bypass to prevent battery damage during wired use

2 A - 5 V - 2.5 W | IP44 (ingress protection) | IK 10 (impact resistance) | CE | FCC | UKCA

Energy rating: E

Powered by Smart & Green



1.21 kg

362282 ● Cactus
362273 ● Honey
362247 ● Anthracite
362221 ● Acapulco Blue

362220 ● Red Ochre
3622B9 ● Black Cherry
3622A5 ● Clay Grey

LIGHTING



BALAD

BALAD


3632 - SPIKE STAND

DESIGN BY TRISTAN LOHNER



Steel wire frame
Steel clip on the ball joint system, with protective rubber pads
Compatible with:
LAMP H.25 CM - BALAD
LAMP H.38 CM - BALAD

- | | |
|------------------------|-----------------------|
| 363282 ● Cactus | 3632B9 ● Black Cherry |
| 363247 ● Anthracite | 3632A5 ● Clay Grey |
| 363221 ● Acapulco Blue | 3632C6 ● Honey |
| 363220 ● Red Ochre | |




3631 - UPRIGHT STAND

DESIGN BY TRISTAN LOHNER



Steel wire frame
Steel ballast
Steel clip with protective rubber pads
Compatible with:
LAMP H.25 CM - BALAD
LAMP H.38 CM - BALAD

- | | |
|------------------------|-----------------------|
| 363182 ● Cactus | 3631B9 ● Black Cherry |
| 363147 ● Anthracite | 3631A5 ● Clay Grey |
| 363121 ● Acapulco Blue | 3631C6 ● Honey |
| 363120 ● Red Ochre | |




3630 - OFFSET STAND

DESIGN BY TRISTAN LOHNER



Steel wire frame
Steel ballast
Steel clip, with protective rubber pads
Compatible with:
LAMP H.38 CM - BALAD
LAMP H.25 CM - BALAD

- | | |
|------------------------|-----------------------|
| 363082 ● Cactus | 3630B9 ● Black Cherry |
| 363047 ● Anthracite | 3630A5 ● Clay Grey |
| 363021 ● Acapulco Blue | 3630C6 ● Honey |
| 363020 ● Red Ochre | |



Recommendations for appropriate installations:

**Choose
Balad H.25 cm
with:**



**Choose
Balad H.38 cm
with:**





BALAD

LIGHTING

BALAD

365100 - SET OF 3 LAMPS BAMBOO H.12 CM

DESIGN BY TRISTAN LOHNER

DOMESTIC | PROFESSIONAL | INTENSIVE

2
IREP

IRCY

INDOOR



Polyethylene diffuser
Bamboo frame
ABS base

Technology: integrated LED - Luminous flux: 20 lm

Switch type: push button

Function of the switch: change the light temperature & brightness
(short click, 1 s), OFF (long click, 3 s)

Lighting mood:

Position 1 cool white (6000°K) 100% brightness

Position 2 neutral white (4000°K) 100% brightness

Position 3 candle-style warm white (2300°K) flickering

Type of power supply: battery - Min. Battery life (100%): 10 h

Battery use cycle: 500 cycles

Recharge time: 4h - Type of recharge: USB, cable (supplied) 1,5m

Bypass to prevent battery damage during wired use

0.25 A - 5 V - 0.3 W - IP44 (ingress protection) | IK 10 (impact resistance) | CE | FCC | UKCA

Powered by Smart & Green



0.13 kg

365200 - LAMP BAMBOO H.25 CM

DESIGN BY TRISTAN LOHNER

DOMESTIC | PROFESSIONAL | INTENSIVE

2
IREP

IRCY

INDOOR



Polyethylene diffuser
Bamboo frame
ABS base

Technology: integrated LED - Luminous flux: 40 lm

Switch type: push button

Function of the switch: change the light temperature & brightness
(short click, 1 s), OFF (long click, 3 s)

Lighting mood:

Position 1 cool white (6000°K) 100% brightness

Position 2 neutral white (4000°K) 100% brightness

Position 3 neutral white (4000°K) 50% brightness

Position 4 candle-style warm white (2300°K) flickering

Type of power supply: battery - Min. Battery life (100%): 7 h


Battery use cycle: 300 cycles

Recharge time: 5h - Type of recharge: USB, cable (supplied) 2m

Bypass to prevent battery damage during wired use

0.5 A - 5 V - 0.5 W - IP44 (ingress protection) | IK 10 (impact resistance) | CE | FCC | UKCA

Powered by Smart & Green



0.47 kg

BALAD

365300 - LAMP BAMBOO H.38 CM

DESIGN BY TRISTAN LOHNER

DOMESTIC PROFESSIONAL INTENSIVE

2
IREP

IRCY

INDOOR



Polyethylene diffuser

Bamboo frame

ABS base

Technology: integrated LED - Luminous flux: 150 lm

Switch type: push button

Function of the switch: change the light temperature & brightness (short click, 1 s), OFF (long click, 3 s)

Lighting mood:

Position 1 cool white (6000°K) 100% brightness

Position 2 cool white (6000°K) 50% brightness

Position 3 neutral white (4000°K) 100% brightness

Position 4 neutral white (4000°K) 50% brightness

Position 5 candle-style warm white (2300°K) flickering

Type of power supply: battery - Min. Battery life (100%) 9 h

Battery use cycle: 300 cycles


Recharge time: 7h - Type of recharge: USB, cable (supplied) 2m

Bypass to prevent battery damage during wired use

2 A - 5 V - 2.5 W - IP44 (ingress protection) | IK 10 (impact resistance) | CE | FCC | UKCA

Energy rating: E

Powered by Smart & Green



1.08 kg

LIGHTING





FERMOB, A RANGE OF LIGHTING

INNOVATIVE AND CONNECTIBLE



Over the last few years, FERMOb has become the **leading brand in the world of autonomous connectible lighting**.

To work with a variety of lifestyles, the FERMOb catalogue offers a **deco-rative and intelligent solution using Bluetooth technology**.


LUDO,

the FERMOb smart switch

A combination of technology to control the lighting atmosphere provided by all FERMOb smart lights.

FERMOB LIGHTING: an app you can use on a smartphone


A combination of superpowers.

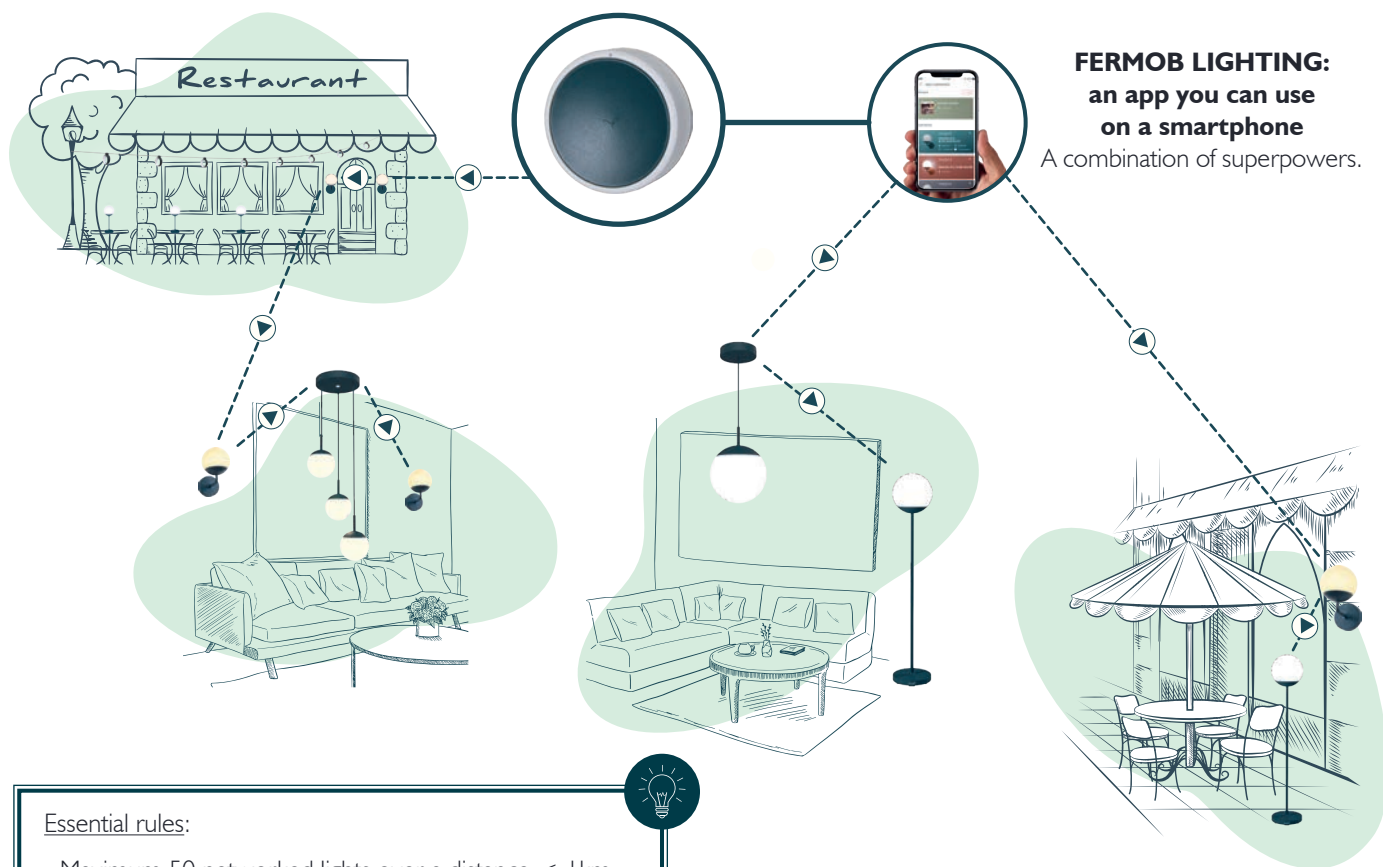

Essential rules:

- Maximum 50 networked lights over a distance < 1 km
- Distance from smartphone to light < 10m
- Distance from switch to light < 15m
- Distance between lights < 10m
- No obstructions (e.g. wall)

WHAT ARE THE FEATURES OF THE FERMOB LIGHTING APP?

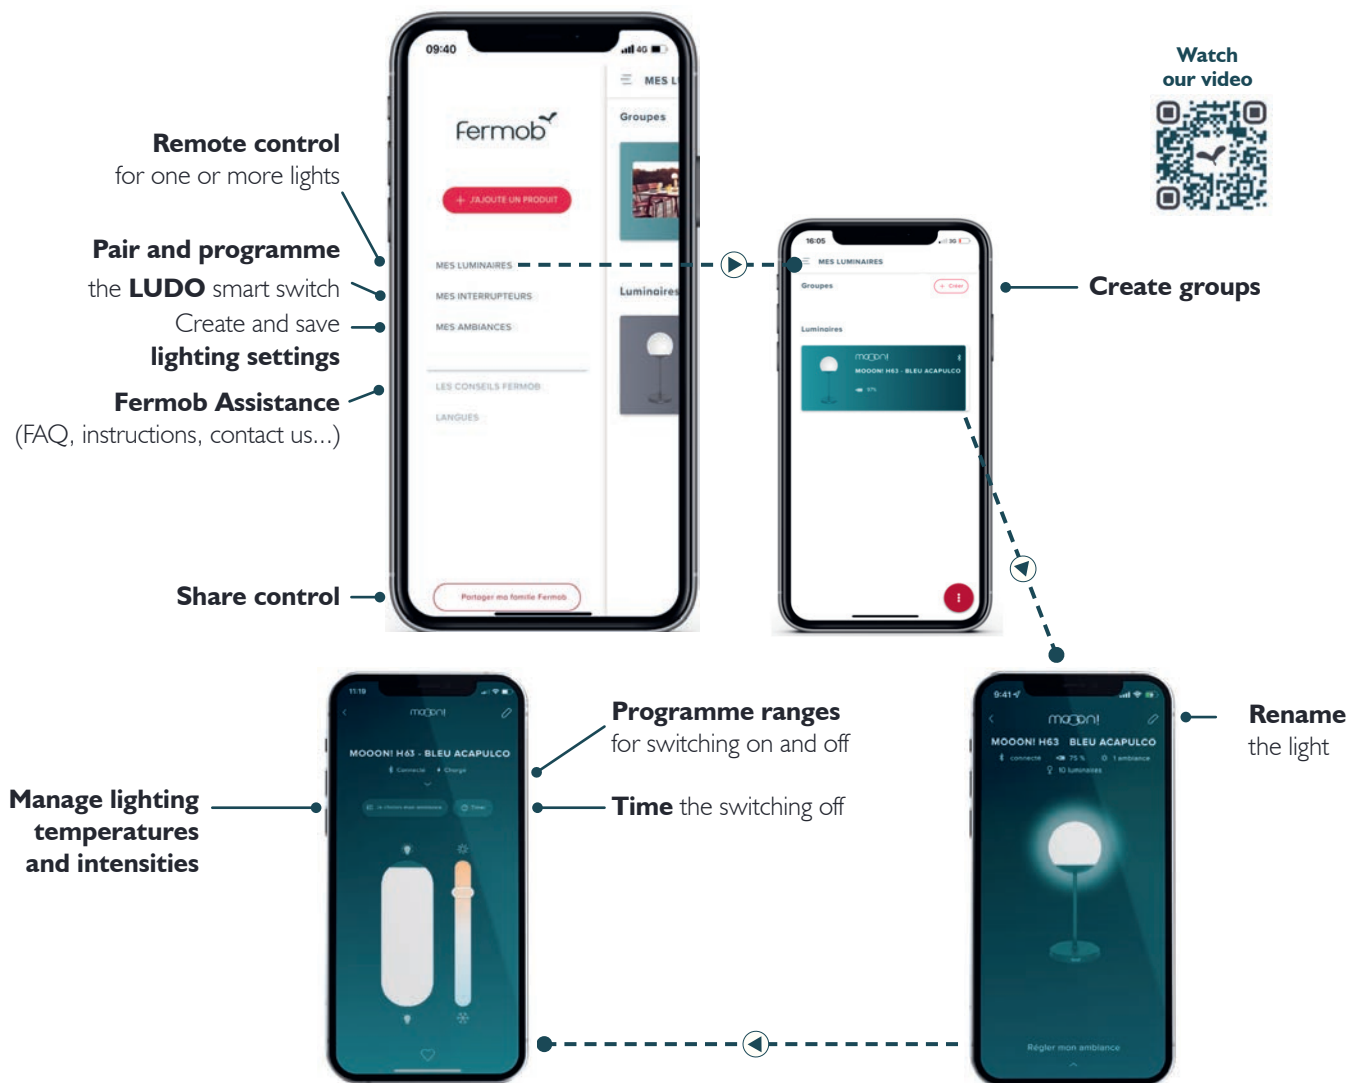

The Fermob Lighting app is compatible with all smartphones equipped with Bluetooth. The app is updated regularly, as products are launched. **MAKE SURE YOU UPDATE IT!**



Any questions?

Go to the Fermob Lighting FAQs on www.fermob.com or directly from the app.

A LOOK AT FERMOB SMART LIGHTS



FERMOB SMART LIGHTS OFFER A UNIQUE CUSTOMISED EXPERIENCE, ACCESSIBLE TO EVERYONE.

HOOPIK

350I - STRING LIGHTS LI 200 CM – TYPE E & F

DESIGN BY J.MAZOYER-DO



Polycarbonate diffuser

ABS frame

Technology: integrated LED - Luminous flux: 960 lm

Switch type: touch-activated dimmer

Function of the switch: ON/OFF (short click, 1s), brightness variation

Lighting mood:

Position 1 warm white (3000°K) dimmer switch (10 to 100%)

Type of power supply: mains - Plug type: Plug type E & F (EU countries excluding UK)

Lighting cable: 6.20 metres (8 rings) + 6-metres main cable

0.24 A - 230 V - 25 W | IP54 (ingress protection) | IK 6 (impact resistance) | CE

Energy rating: F

Powered by Smart & Green

Compatible with:


FERMOB LIGHTING APPLICATION - FERMOB LIGHTING

SMART SWITCH - LUDO

350121 ● Acapulco Blue

3501B9 ● Black Cherry

350182 ● Cactus



2.2 kg

3502 - STRING LIGHTS LI 200 CM – TYPE I

DESIGN BY J.MAZOYER-DO



Polycarbonate diffuser

ABS frame

Technology: integrated LED - Luminous flux: 960 lm

Switch type: touch-activated dimmer

Function of the switch: ON/OFF (short click, 1s), brightness variation

Lighting mood:

Position 1 warm white (3000°K) dimmer switch (10 to 100%)

Type of power supply: mains - Plug type: Plug type I (Australia, New-Zealand, China)

Lighting cable: 6.20 metres (8 rings) + 6-metres main cable

0.24 A - 230 V - 25 W - IP54 (ingress protection) | IK 6 (impact resistance) | CE

Energy rating: F

Powered by Smart & Green

Compatible with:


FERMOB LIGHTING APPLICATION - FERMOB LIGHTING

SMART SWITCH - LUDO

350221 ● Acapulco Blue

350220 ● Red Ochre

350282 ● Cactus



2.2 kg

HOOPIK

3503 - STRING LIGHTS LI 200 CM – TYPE J

DESIGN BY J.MAZOYER-DO

DOMESTIC | PROFESSIONAL | INTENSIVE

1
IREP

IRCY

4
COLORS



Polycarbonate diffuser

ABS frame

Technology: integrated LED - Luminous flux: 960 lm

Switch type: touch-activated dimmer

Function of the switch: ON/OFF (short click, 1s), brightness variation

Lighting mood:

Position 1 warm white (3000°K) dimmer switch (10 to 100%)

Type of power supply: mains - Plug type : Plug type J (Switzerland, Liechtenstein)

Lighting cable: 6.20 metres (8 rings) + 6-metres main cable

0.24 A - 230 V - 25 W | IP54 (ingress protection) | IK 6 (impact resistance) | CE

Energy rating: F

Powered by Smart & Green

Compatible with:

FERMOB LIGHTING APPLICATION - FERMOB LIGHTING


SMART SWITCH - LUDO

350321 ● Acapulco Blue

350320 ● Red Ochre

350382 ● Cactus

3503B9 ● Black Cherry



2.2 kg

LIGHTING

hoopik
LI200


MUCH MORE THAN A GARLAND...

HOOPIK LI200 is a fully fledged
aerial lighting solution.

It consists of a 12-metre matt black cable, including a 6-metre hanging cable, plus 8 LED spotlights that are adjustable through 360° and 2 hook mechanisms, one at each end.

The dimmer switch, which is easy to access once installed, means it's equally suited to both a muted lounge area and a large, brightly lit table.

What's more, it's equipped with Bluetooth technology and can be controlled remotely with the Fermob Lighting app or the Ludo connected outdoor switch.

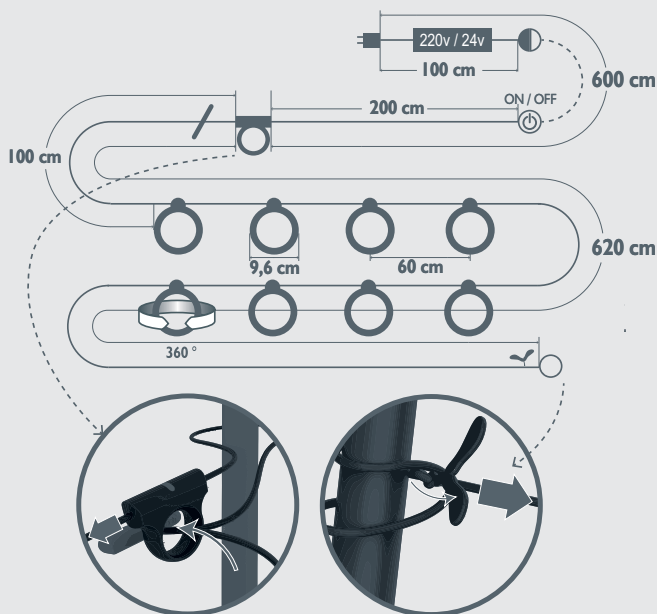

HOOPIK

3510 - LAMP Ø24 CM
DESIGN BY J. MAZOYER-DO

NEW


DOMESTIC PROFESSIONAL INTENSIVE

1 IREP

IRCY

INDOOR

4



Polycarbonate diffuser

Aluminium frame

ABS Base

Technology: integrated LED - Luminous flux: 200 lm

Switch type: touch-activated dimmer

Function of the switch: change the brightness (10 to 100%, click 4 s),

change the light temperature (double short click),

ON/OFF (short click, 1 s)

Lighting mood:

Position 1 warm white (2700°K) dimmer switch (10 to 100%)

Position 2 neutral white (4000°K) dimmer switch (10 to 100%)

Type of power supply: battery - Min. Battery life (100%): 8 h

Battery use cycle: 300 cycle


Recharge time: 5h - Type of recharge: USB Fermob magnet - 1.5 m cable (provided)

Bypass to prevent battery damage during wired use

2 A - 5 V - 10 W - IP42 (Ingress protection) | IK 10 (Impact resistance) | CE | FCC | UKCA

Energy rating: F

Powered by Smart & Green



0,8 kg

351021 Acapulco Blue
351020 Red Ochre

3510C7 Grey lapilli
351042 Liquorice

Watch our video



HOOPIK





3304 - LIGHTING STOOL H.44 CM

DESIGN BY STUDIO FERMOB

DOMESTIC | PROFESSIONAL | INTENSIVE

2
IREP

IRCY

10
IPAC

5



Polyethylene diffuser

Steel seat

ABS base

Technology: integrated LED - Luminous flux: 250 lm

Switch type: push button

Function of the switch: change the light temperature (long click, 3 s), change the brightness (short click, 1 s), Reset Bluetooth pairing (click and hold for 10 s)

Lighting mood:

Position 1 cool white (6000°K) 50% brightness

Position 2 cool white (6000°K) 100% brightness

Position 3 warm white (3000°K) 50% brightness

Position 4 warm white (3000°K) 100% brightness

Lighting mood via Bluetooth:

White light variable from 6000°K to 3000°K & dimmer switch (10 to 100%)

Type of power supply: battery - Min. Battery life (100%) 9 h

Battery use cycle: 300 cycles

Recharge time: 4h - Type of recharge: ABS plastic charging base & transformer

I 10-230 Apv*-24 Dpv** IPX0, powered by mains electricity

Plug type : 4 plugs multi-type (J, K, G, F, L, E, B, I)

Bypass to prevent battery damage during wired use

1.5 A - 24 V - 7 W - IP54 (ingress protection) | IK 8 (impact resistance) | CE

Energy rating: G

Powered by Smart & Green

Compatible with:

APPLICATION FERMOB LIGHTING - FERMOB LIGHTING

SMART SWITCH - LUDO


330421 ● Acapulco Blue

330447 ● Anthracite

330482 ● Cactus

330420 ● Red Ochre

3304B9 ● Black Cherry



5 kg




* Alternating power volt / **Direct power volt

LUDO

3390 - SMART SWITCH
DESIGN BY STUDIO FERMOB

DOMESTIC PROFESSIONAL INTENSIVE



Aluminum

Base ABS

Switch type: push button

Function of the switch: change the light temperature (click 1 s),
Reset Bluetooth pairing (click and hold for 10 s), change the brightness
(10 to 100%, click 4 s), ON/OFF (short click, 1 s)

Lighting mood:

Position 1 cool white (6000°K) dimmer switch (10 to 100%)

Position 2 warm white (3000°K) dimmer switch (10 to 100%)

Type of fastening: magnetic, adhesive (double-sided, included) or screw-in
(screws not included) thanks to a white wall mount

Type of power supply: pile CR 2450

0.5 A - 3 V | IP54 (ingress protection) | IK 10 (impact resistance) | CE

Powered by Smart & Green

Compatible with:

STRING LIGHTS L I 200 CM - TYPE E & F - HOOPIK

STRING LIGHTS L I 200 CM - TYPE I - HOOPIK

STRING LIGHTS L I 200 CM - TYPE J - HOOPIK

LIGHTING STOOL H.44 CM - INOUÏ


WALL LIGHT Ø15 CM - MOOON!

LAMP H.63 CM - MOOON!

LAMP H.134 CM - MOOON!

TRIPLE PENDANT LIGHTS Ø15 CM - MOOON!

PENDANT LIGHTS 25 CM - MOOON!




339082 Cactus
339047 Anthracite

339021 Acapulco Blue

Watch
our video



LIGHTING

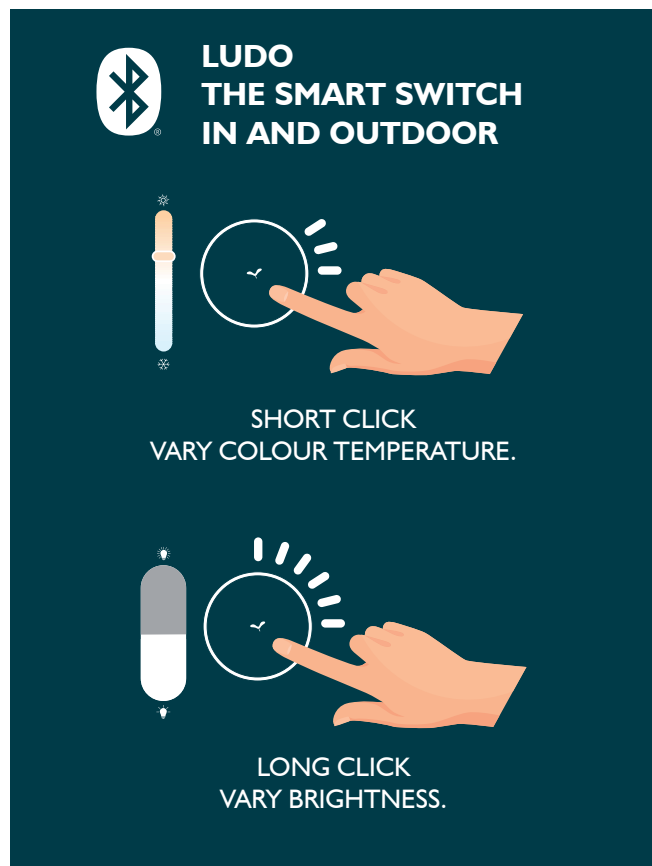

MOOON!

5303 - LAMP H.41 CM
DESIGN BY TRISTAN LOHNER

DOMESTIC | PROFESSIONAL | INTENSIVE

2 IREP

IRCY

8



Polyethylene diffuser

Aluminium frame

ABS base

Technology: integrated LED - Luminous flux: 150 lm

Switch type: dimmer

Function of the switch: change the brightness (10 to 100%, click 4 s),
change the light temperature (double short click), ON/OFF (short click, 1 s)

Lighting mood:

Position 1 cool white (6000°K) dimmer switch (10 to 100%)

Position 2 warm white (3000°K) dimmer switch (10 to 100%)

Type of power supply: battery - Min. Battery life (100%) 8 h

Battery use cycle: 300 cycles

Recharge time: 7h - Type of recharge: USB, cable (supplied) 2m

Bypass to prevent battery damage during wired use

2 A - 5 V - 2.5 W - IP44 (ingress protection) | IK 10 (impact resistance) | CE | FCC | UKCA

Energy rating: F

Powered by Smart & Green



0.7 kg

530382 ● Cactus
530373 ● Honey
530314 ● Nutmeg
530347 ● Anthracite

530321 ● Acapulco Blue
530320 ● Red Ochre
5303A5 ● Clay Grey
5303B9 ● Black Cherry

5304 - LAMP H.41 MAX
DESIGN BY TRISTAN LOHNER


DOMESTIC | PROFESSIONAL | INTENSIVE

2 IREP

IRCY

INDOOR

4



Glass diffuser

Aluminium frame

ABS base

Technology: integrated LED

Luminous flux on battery: 200 lm - Luminous flux on mains: 300 lm

Switch type: touch-activated dimmer

Function of the switch: change the brightness (10 to 100%, click 4 s),
change the light temperature (double short click), ON/OFF (short click, 1 s)

Lighting mood:

Position 1 warm white (2700°K) dimmer switch (10 to 100%)

Position 2 neutral white (4000°K) dimmer switch (10 to 100%)

Type of power supply: battery - Min. Battery life (100%) 7 h

Battery use cycle: 300 cycles

Recharge time: 7h - Type of recharge: USB Fermob magnet – 1.5 m cable (provided)

Bypass to prevent battery damage during wired use

2 A - 5 V - 3 W - IP44 (ingress protection) | IK 0 (impact resistance) | CE | FCC

Energy rating: F

Powered by Smart & Green



1 kg

5304B9 ● Black Cherry
530482 ● Cactus

530421 ● Acapulco Blue
530447 ● Anthracite

Watch
our video



Fermob
magnet



- Charging system
- Practical & easy to use
- Identifiable (due to samara)



	LAMP H.41 MAX	LAMP H.41
Diffuser	Glass	Polyethylene
Lighting power	200 to 300 lm	150 lm
Colour temperatures	2700°K + 4000°K	3000°K + 6000°K
Switch	Touch - activated dimmer	Dimmer
Recharge	USB induction with its Fermob magnet	USB
Battery life	7h	8h



MOOON!

5320 - LAMP H.63 CM

DESIGN BY TRISTAN LOHNER

DOMESTIC | PROFESSIONAL | INTENSIVE

2
IREP

IRCY

5



Polyethylene diffuser

Aluminium frame

ABS base

Technology: integrated LED - Luminous flux: 500 lm

Switch type: touch-activated

Function of the switch: change the light temperature (long click, 3 s), change the brightness (short click, 1 s), Reset Bluetooth pairing (click and hold for 10 s)

Lighting mood:

Position 1 cool white (6000°K) 50% brightness

Position 2 cool white (6000°K) 100% brightness

Position 3 warm white (3000°K) 50% brightness

Position 4 warm white (3000°K) 100% brightness

Lighting mood via Bluetooth:

White light variable from 6000°K to 3000°K & dimmer switch (10 to 100%)

Type of power supply: battery - Min. Battery life (100%) 7 h

Battery use cycle: 300 cycles

Recharge time: 4h - Type of recharge: ABS plastic charging base & transformer

110-230 Apv*-24 Dpv** IPX0, powered by mains electricity

Plug type: 4 plugs multi-type (J, K, G, F, L, E, B, I)

Bypass to prevent battery damage during wired use

1.5 A - 24 V - 7 W - IP44 (ingress protection) | IK 10 (impact resistance) | CE | FCC

Energy rating: F

Powered by Smart & Green

Compatible with:

FERMOB LIGHTING APPLICATION - FFERMOB LIGHTING

SMART SWITCH - LUDO

532082 ● Cactus

5320B9 ● Black Cherry

532047 ● Anthracite

532021 ● Acapulco Blue

532020 ● Red Ochre



2.65 kg



* Alternating power volt / **Direct power volt


MOOOON!

5310 - LAMP H.134 CM
DESIGN BY TRISTAN LOHNER

DOMESTIC PROFESSIONAL INTENSIVE

2
IREP

IRCY



Polyethylene diffuser
Aluminium frame
ABS base

Technology: integrated LED - Luminous flux: 500 lm

Switch type: touch-activated

Function of the switch: change the light temperature (long click, 3 s),
change the brightness (short click, 1 s), Reset Bluetooth pairing
(click and hold for 10 s)

Lighting mood:

Position 1 cool white (6000°K) 50% brightness

Position 2 cool white (6000°K) 100% brightness

Position 3 warm white (3000°K) 50% brightness

Position 4 warm white (3000°K) 100% brightness

Lighting mood via Bluetooth:

White light variable from 6000°K to 3000°K & dimmer switch (10 to 100%)

Type of power supply: battery - Min. Battery life (100%) 7 h

Battery use cycle: 300 cycles

Recharge time: 4h - Type of recharge: ABS plastic charging base & transformer

I 10-230 Apv*-24 Dpv** IPX0, powered by mains electricity

Plug type: 4 plugs multi-type (J, K, G, F, L, E, B, I)

Bypass to prevent battery damage during wired use

1.5 A - 24 V - 7 W - IP44 (ingress protection) | IK 10 (impact resistance) | CE | FCC | UKCA


Energy rating: F

Powered by Smart & Green

Compatible with:

FERMOB LIGHTING APPLICATION - FERMOB LIGHTING

SMART SWITCH - LUDO



5.4 kg

531082 ● Cactus
5310B9 ● Black Cherry

531047 ● Anthracite
531021 ● Acapulco Blue

LIGHTING



* Alternating power volt / **Direct power volt

MOOON!

5330 - WALL LIGHT Ø15 CM

DESIGN BY TRISTAN LOHNER

DOMESTIC | PROFESSIONAL | INTENSIVE

2
IREP

IRCY



Glass diffuser

Aluminium frame

Recycled ABS base

Technology: integrated LED - Luminous flux: 350 lm

Lighting mood:

Position 1 warm white (3000°K) 100% brightness

Lighting scenario via Bluetooth:

White light variable from 6000°K to 3000°K & dimmer switch (10 to 100%)

Type of fastening: Quick'n'click for fast installation with a single quarter turn (integrated spirit level and detachable base)

Type of power supply: wall mount

0.24 A - 230 V - 12 W | IP54 (ingress protection) | IK 0 (impact resistance) | CE | UKCA


Energy rating: F

Powered by Smart & Green

Compatible with:

FERMOB LIGHTING APPLICATION - FERMOB LIGHTING

SMART SWITCH - LUDO



0.9 kg

- 533082 ● Cactus
- 533047 ● Anthracite
- 533021 ● Acapulco Blue

- 533020 ● Red Ochre
- 5330B9 ● Black Cherry

Watch
our video



quick'n clic

Easy installation



Watch
our video



MOON!

LIGHTING



MOOON!

5340 - TRIPLE PENDANT LIGHTS Ø15 CM

DESIGN BY TRISTAN LOHNER

NEW

DOMESTIC | PROFESSIONAL | INTENSIVE

2 IREP

IRCY

4



Glass diffuser
Aluminium frame
Recycled ABS base

Technology: integrated LED - Luminous flux: 1050 lm

Function of the switch: change the light temperature (click 1 s),
change the brightness (10 to 100%, click 4 s), ON/OFF (short click, 1 s)

Lighting mood:

Position 1 cool white (6000°K) dimmer switch (10 to 100%)

Position 2 warm white (3000°K) dimmer switch (10 to 100%)

Lighting scenario via Bluetooth:

White light variable from 6000°K to 3000°K & dimmer switch (10 to 100%)

Type of fastening: Quick'n'click for fast installation with a single quarter
turn (detachable base)

Type of power supply: wired

Height adjustable cable

0.19 A - 230 V - 17 W - IP42 (ingress protection) | IK 0 (impact resistance) | CE | FCC | UKCA

Energy rating: E

Powered by Smart & Green

Compatible with:


FERMOB LIGHTING APPLICATION - FERMOb LIGHTING
SMART SWITCH - LUDO

5340B9 ● Black Cherry

534021 ● Acapulco Blue

534082 ● Cactus

534047 ● Anthracite



2.5 kg

Watch
our video



5350 - PENDANT LIGHTS Ø25 CM

DESIGN BY TRISTAN LOHNER

NEW

DOMESTIC | PROFESSIONAL | INTENSIVE

2 IREP

IRCY

4



Glass diffuser
Aluminium frame
Recycled ABS base

Technology: integrated LED - Luminous flux: 1000 lm

Function of the switch: change the light temperature (click 1 s),
change the brightness (10 to 100%, click 4 s), ON/OFF (short click, 1 s)

Lighting mood:

Position 1 cool white (6000°K) dimmer switch (10 to 100%)

Position 2 warm white (3000°K) dimmer switch (10 to 100%)

Lighting scenario via Bluetooth:

White light variable from 6000°K to 3000°K & dimmer switch (10 to 100%)

Type of fastening: Quick'n'click for fast installation with a single quarter
turn (detachable base)

Type of power supply: wired

Height adjustable cable

0.19 A - 230 V - 15 W - IP42 (ingress protection) | IK 0 (impact resistance) | CE | FCC | UKCA

Energy rating: E

Powered by Smart & Green

Compatible with:


FERMOB LIGHTING APPLICATION - FERMOb LIGHTING
SMART SWITCH - LUDO

5350B9 ● Black Cherry

535021 ● Acapulco Blue

535082 ● Cactus

535047 ● Anthracite



2 kg

Watch
our video



MOOON!

LIGHTING



OTO


3960 - LAMP H.27 CM
DESIGN BY STUDIO FERMOB

NEW

DOMESTIC | PROFESSIONAL | INTENSIVE

1
IREP

IRCY



Polycarbonate diffuser

Aluminium frame

Recycled ABS base

Technology : integrated LED - Luminous flux: 400 lm

Switch type: touch-activated dimmer

Function of the switch: change the brightness (10 to 100%, click 4 s), change the light temperature (double short click), ON/OFF (short click, 1 s)

Lighting mood:

Position 1 cool white (6000°K) dimmer switch (10 to 100%)

Position 2 warm white (3000°K) dimmer switch (10 to 100%)

Type of fastening: A metal buckle located underneath the lamp for hanging

Type of power supply: battery - Min. Battery life (100%) 6 h

Battery use cycle: 300 cycle


Recharge time: 6 h - Type of recharge: USB Fermob magnet – 1.5 m cable (provided)

Bypass to prevent battery damage during wired use

2 A - 5 V - 6 W - IP54 (ingress protection) | IK 8 (impact resistance) | CE | FCC | UKCA

Energy rating: F

Powered by Smart & Green



1.1 kg

3960C7 ● Lapilli Grey

396020 ● Red ochre

396042 ● Liquorice

3960A5 ● Clay Grey

Watch
our video





3810 - LAMP H.30 CM
DESIGN BY STUDIO FERMOB

NEW

DOMESTIC

PROFESSIONAL

INTENSIVE

2
IREP

IRCY



Polycarbonate diffuser

Aluminium frame

ABS Base

Technology: integrated LED - Luminous flux: 220 lm

Switch type: touch-activated dimmer

Function of the switch: change the light temperature (clic 1s),
change the brightness (10 to 100%, click 4 s),
change the light temperature (double short click), ON/OFF (short click, 1s)

Lighting mood:

Position 1 warm white (3000°K) dimmer switch (10 to 100%)

Position 2 cool white (6000°K) dimmer switch (10 to 100%)

Type of power supply: battery - Min. Battery life (100%): 6 h

Battery use cycle: 300 cycle


Recharge time: 4h - Type of recharge : USB Fermob magnet – 1.5 m cable (provided)

Bypass to prevent battery damage during wired use

2 A - 5 V - 3 W - IP54 (Ingress protection) | IK 6 (Impact resistance) | CE | FCC | UKCA

Energy rating: F

Powered by Smart & Green



0.6 kg

Watch
our video



381067 ● Poppy
381092 ● Deep blue

381002 ● Cedar green
3810C6 ● Honey





PROTECTION & MAINTENANCE

PROTECTION IN DAILY USE

Fermob lights are quality products that require a few use and storage precautions in order to preserve all their properties and thus extend their life to the maximum.

- **Store in a dry and ventilated area** when not in use,
- **Regularly clean** (more so in areas with high levels of humidity),
- **Recharge in a weatherproof environment** with a temperature between +0 and +40°C,
- **Only use the charging and power supply equipment provided,**
- **Do not let the lamp's battery run flat,**
- **Opt for frequent, short-duration charges.**



A battery's lifespan depends on several factors:

- The environment in which the product is used (temperature, humidity, etc.),
- The environment in which the product is charged (temperature, humidity, etc.).

Maintenance



PROTECTION DURING WINTER/STORAGE

- **Clean and restore** as required,
- **Store your lamp with its battery partially charged, in a dry, well-ventilated spot,** sheltered from direct sunlight.

CLEAN THE SURFACES



To preserve their original appearance, most of our materials require basic precautions. They can be damaged, to a varying extent, depending on the product type, by:

- **mechanical factors:** wear and tear, scratches, impact, distortion, etc.
- **chemical factors:** acids, bases, solvents, etc.

Our surfaces must therefore be cleaned in accordance with the following principles :

- **Systematically carry out a preliminary test on non-visible and restricted areas** to determine compatibility (e.g. underneath the product),
- **Do not use abrasive products** or products which may affect the condition of the surface (abrasive sponges, wire wool, pads, scouring creams or powders, dyed textiles which may leave marks, etc.),
- **Do not use aggressive chemicals** (solvents, alkaline detergents, etc),
- **Beware of retention areas** in which cleaning products can be trapped, leading to further damage,
- **Comply with the conditions of use** of the products used (dilution, diffusion, application time, etc.).



Our recommendations are as follows :



Use soapy water
for very stubborn dirt.



Apply with a **soft sponge** or a soft
cloth made of a non-abrasive material.
Rinse with water.



Wipe carefully with
a microfibre cloth to prevent
limescale marks.



For lights rated below IPX4 or with wall-mounted power supply*: **use a clean, damp cloth.**

*Remember to turn off wall switch & cut power.



FOCUS ON MILD MULTI-PURPOSE CLEANER

- Allows you to clean all your Fermob products,
- Effective on metal (aluminium or painted steel), polyethylene, polycarbonate & glass.
(Do not use on Bamboo).



The following products may be used but they should be diluted and subject to extensive compatibility testing: :

- Ethanol
- Bleach (98% dilution)



We strongly advise against the following non-exhaustive list of products; unless appropriately diluted, they could damage our materials:

- Alcohol, isopropanol
- Petrol, white spirit, solvents, dissolvents
- Hydrocarbons, caustic soda, ammonia
- Alkaline detergents (pH>9)
- Acids
- Polish
- Products to remove graffiti
- etc.

SPARE PARTS



Following marketing, our **continuous improvement process** allows us to **improve the user experience** and **extend the life span** of our **durable eco-designed products**.

Fermob **considers the design** of its lighting products to **make them easier to disassemble**. **Several components can be replaced**. See below:

APLÔ

364000 - SET OF 4 USB WALL CHARGERS- 5V/2A



Compatible with :

LAMP H.24 CM - APLÔ

LAMP H.12, H.25, H.38 - BALAD & BALAD BAMBOO

LAMP H.41 CM - MOOON!

LAMP H.41 CM MAX - MOOON!

LAMP H.30 CM - ULLI

LAMP Ø24 CM - HOOPIK

LAMP H.27 CM - OTO

364600 - USB-C CABLE H24 LAMP



Compatible with :

LAMP H.24 CM - APLÔ

364600  White

344200 - CONTROL BOARD FOR H.24 LAMP

NEW



Compatible with :

LAMP H.24 CM - APLÔ

344100 - BATTERY FOR H.24 LAMP

NEW



Compatible with :
LAMP H.24 CM - APLÔ

344000 - DIFFUSER FOR H.24 LAMP

NEW



Compatible with :
LAMP H.24 CM - APLÔ

344000 Transparent

BALAD

364000 - SET OF 4 USB WALL CHARGERS- 5V/2A



Compatible with :
LAMP H.24 CM - APLÔ
LAMP H.12, H.25, H.38 - BALAD & BALAD BAMBOO
LAMP H.41 CM - MOOON!
LAMP H.41 CM MAX - MOOON!
LAMP H.30 CM - ULLI
LAMP Ø24 CM - HOOPIK
LAMP H.27 CM - OTO

364400 - USB-C CABLE X3 H.12 LAMPS



Compatible with :
SET OF 3 LAMPS BAMBOO H.12 CM - BALAD
SET OF 3 LAMPS H.12 CM - BALAD

364400  Blanc

366000 - BATTERY-POWERED LIGHTING MODULE FOR H.12 X3 LAMP

NEW



Compatible with :
SET OF 3 LAMPS H.12 CM - BALAD
SET OF 3 LAMPS BAMBOO H.12 CM - BALAD

366200 - DIFFUSER FOR H.12 LAMP

NEW



Compatible with :
SET OF 3 LAMPS BAMBOO H.12 CM - BALAD
SET OF 3 LAMPS H.12 CM - BALAD

366200 Transparent

BALAD

364100 - USB CABLE




Compatible with :
LAMP BAMBOO H.25 CM - BALAD
LAMP H.25 CM - BALAD
LAMP H.38 CM - BALAD
LAMP BAMBOO H.38 CM - BALAD
LAMP H.41 CM - MOOON!

364100  Blanc

366300 - BATTERY-POWERED LIGHTING MODULE FOR H.25 LAMP

NEW



Compatible with :
LAMP BAMBOO H.25 CM - BALAD
LAMP H.25 CM - BALAD

366400 - DIFFUSER FOR H.25 LAMP

NEW



Compatible with :
LAMP BAMBOO H.25 CM - BALAD
LAMP H.25 CM - BALAD

366400 Transparent

366500 - BATTERY-POWERED LIGHTING MODULE FOR H.38 LAMP

NEW



Compatible with :
LAMP BAMBOO H.38 CM - BALAD
LAMP H.38 CM - BALAD

BALAD

366600 - DIFFUSER FOR H.38 LAMP

NEW



Compatible with :
LAMP BAMBOO H.38 CM - BALAD
LAMP H.38 CM - BALAD

366600 Transparent

284400 - BAG OF SCREWS FOR OFFSET STAND



Compatible with :
OFFSET STAND - BALAD

2814A - BAG OF SCREWS FOR SPIKE STAND

NEW



Compatible with :
SPIKE STAND - BALAD

281400 - 6 PADS AND CLIP FOR STANDS



Compatible with :
UPRIGHT STAND - BALAD
SPIKE STAND - BALAD
OFFSET STAND - BALAD

281400 Noir

HOOPIK

355000 - POWER SUPPLY FOR STRING LIGHTS L.I 200 CM

NEW



Compatible with :

STRING LIGHTS LI 200 CM – TYPE E & F - HOOPIK

STRING LIGHTS LI 200 CM – TYPE J - HOOPIK

STRING LIGHTS LI 200 CM - TYPE I - HOOPIK

355000

Black

539000 - FERMOB MAGNET CABLE

NEW



Compatible with :

LAMP H.41 MAX - MOOON!

LAMP H.27 CM - OTO

LAMP Ø24 CM - HOOPIK

LAMP H.30 CM - ULLI

539000

Black

364500 - CHARGING BASE FOR H44 LIGHTING STOOL



Compatible with :
 LIGHTING STOOL H.44 CM - INOUI
 LAMP H.63 CM - MOOON!
 LAMP H.134 CM - MOOON!

364500  Blanc

331100 - LIGHTING MODULE FOR H.44 LIGHTING STOOL

NEW



Compatible with :
 LIGHTING STOOL H.44 CM - INOUI

331000 - BATTERY FOR H.44 LIGHTING STOOL

NEW



Compatible with :
 LIGHTING STOOL H.44 CM - INOUI

MOOON!

364000 - SET OF 4 USB WALL CHARGERS- 5V/2A



Compatible with :
LAMP H.24 CM - APLÔ
LAMP H.12, H.25, H.38 - BALAD & BALAD BAMBOO
LAMP H.41 CM - MOOON!
LAMP H.41 CM MAX - MOOON!
LAMP H.30 CM - ULLI
LAMP Ø24 CM - HOOPIK
LAMP H.27 CM - OTO

539000 - FERMOB MAGNET CABLE

NEW



Compatible with :
LAMP H.41 MAX - MOOON!
LAMP H.27 CM - OTO
LAMP Ø24 CM - HOOPIK
LAMP H.30 CM - ULLI

539000 Black

364100 - USB CABLE H41 LAMP

NEW



Compatible with :
LAMP H.41 CM - MOOON!
LAMP H.25 CM - BALAD
LAMP H.38 CM - BALAD
LAMP BAMBOO H.25 CM - BALAD
LAMP BAMBOO H.38 CM - BALAD

364100  White

539500 - BATTERY-POWERED LIGHTING MODULE FOR H.41 LAMP

NEW



Compatible with :
LAMP H.41 CM - MOOON!

539600 - BATTERY FOR H.41 LAMP

NEW



Compatible with :
LAMP H.41 CM - MOOON!

MOOON!

539400 - DIFFUSER FOR H.4I LAMP

NEW



Compatible with :
LAMP H.4I CM - MOOON!

539400 Transparent

539700 - LIGHTING MODULE FOR H.4I MAX LAMP

NEW



Compatible with :
LAMP H.4I MAX - MOOON!

539800 - BATTERY FOR H.4I MAX LAMP

NEW



Compatible with :
LAMP H.4I MAX - MOOON!

364500 - CHARGING BASE FOR H63 & H.134 LAMPS

NEW



Compatible with :
LAMP H.63 CM - MOOON!
LAMP H.134 CM - MOOON!
LIGHTING STOOL H.44 CM - INOUÏ

364500  White

539300 - LIGHTING MODULE FOR H.63 & H.134 LAMPS

NEW



Compatible with :
LAMP H.63 CM - MOOON!
LAMP H.134 CM - MOOON!

MOOON!

539200 - BATTERY FOR H.63 & H.134 LAMPS

NEW



Compatible with :
LAMP H.63 CM - MOOON!
LAMP H.134 CM - MOOON!

539100 - DIFFUSER FOR H.63 & H.134 LAMPS

NEW



Compatible with :
LAMP H.63 CM - MOOON!
LAMP H.134 CM - MOOON!

539100 Transparent

364800 - LIGHTING MODULE FOR Ø15 WALL LIGHT



Compatible with :
WALL LIGHT Ø15 CM - MOOON!

364900 - POWER SUPPLY WALL LIGHT Ø15



Compatible with :
WALL LIGHT Ø15 CM - MOOON!

364700 - GLASS DIFFUSER Ø15



Compatible with :
WALL LIGHT Ø15 CM - MOOON!
TRIPLE PENDANT LIGHTS Ø15 CM - MOOON!
LAMP H.41 MAX - MOOON!

364700 Transparent

MOOON!

538600 - LIGHTING MODULE FOR TRIPLE PENDANT LIGHTS Ø15

NEW



Compatible with :
TRIPLE PENDANT LIGHTS Ø15 CM - MOOON!

538500 - POWER SUPPLY FOR TRIPLE PENDANT LIGHTS Ø15

NEW



Compatible with :
PENDANT LIGHT Ø25 CM - MOOON!

538900 - LIGHTING MODULE FOR PENDANT LIGHTS Ø25

NEW



Compatible with :
PENDANT LIGHT Ø25 CM - MOOON!

538800 - POWER SUPPLY FOR PENDANT LIGHTS Ø25

NEW



Compatible with :
TRIPLE PENDANT LIGHTS Ø15 CM - MOOON!

538700 - GLASS DIFFUSER Ø25

NEW



Compatible with :
PENDANT LIGHT Ø25 CM - MOOON!

538700 Transparent

539000 - FERMOB MAGNET CABLE

NEW



Compatible with :
LAMP H.41 MAX - MOOON!
LAMP H.27 CM - OTO
LAMP Ø24 CM - HOOPIK
LAMP H.30 CM - ULLI

539000 Noir

399900 - BATTERY FOR H.27 LAMP

NEW



Compatible with :
LAMP H.27 CM - OTO

364000 - SET OF 4 USB WALL CHARGERS- 5V/2A



Compatible with :
LAMP H.24 CM - APLÔ
LAMP H.12, H.25, H.38 - BALAD & BALAD BAMBOO
LAMP H.41 CM - MOOON!
LAMP H.41 CM MAX - MOOON!
LAMP H.30 CM - ULLI
LAMP Ø24 CM - HOOPIK
LAMP H.27 CM - OTO

MAINTENANCE

000901 - MULTI-PURPOSE CLEANER (500 ML)



Ready-to-use spray

For cleaning all Fermob furniture

Works on metal (aluminium or painted steel), Outdoor Technical Fabric (OTF), woven resin, synthetic fibres... (do not use on teak)



MARKETING TOOLS

AVAILABLE

Unit price exc. VAT

SALES TOOLS



TECHNICAL BOOKLET
LIGHTING

15 €



PRICELIST - LIGHTING

3 €

MARKETING TOOLS - RETAIL



FERMOB BAGS- SMALL 38/10x28 (lot de 50)

Ref : 000850

40 €

FERMOB BAGS - MEDIUM 46/21x36 (lot de 50)

Ref : 000851

55 €

FERMOB BAGS - LARGE 60/30x52 (lot de 50))

Ref : 000852

75 €



BRAND AND PRODUCT VIDEOS

To liven up your sales outlet

Download from www.fermob.com

Available in your
retailers' area



FERMOB PRODUCT TRAINING DAY

Everything you need to know about Fermob, its history and its products. The training day can be followed by a visit to the production site..

Free, on request to
your sales
representative



FERMOB.COM

Find detailed information on our website, from your tablet, PC or smartphone.

MARKETING TOOLS - RETAIL



COLLABORATIVE WELCOME PLATFORM

- 1 - Place your orders online and track their progress
- 2 - Find all our media supports instantly (technical booklet, price list, ambient visuals, packshot, etc.)

<https://welcome.fermob.com/> or scan the QR code :



LIGHTING PRODUCT LABELS

Contact your customer department

15 €



SELF-STANDING APLÔ CARDS

Contact your customer department

4 €



SELF-STANDING BALAD CARDS

Contact your customer department

4 €



SELF-STANDING ULLI CARDS

Contact your customer department

4 €



SELF-STANDING MOOON! TABLE LIGHT CARDS

Contact your customer department

4 €



SELF-STANDING MOOON! PENDANT WALL LIGHTS CARDS

Contact your customer department

4 €



LIGHTING POS

GLOBAL SUSTAINABLE APPROACH

Contact your customer department

4 €

DISPLAY



DISPLAY CASE

FERMOB LIGHTING & LUDO

Contact your customer department

Limited quantity.
Get closer to your
commercial contact

MOON!





.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

LEGAL NOTICE: Weights and dimensions provided for information purposes only. Photos and texts not contractually binding. The Technical Booklet and all of its contents (items of furniture, texts, photographs, illustrations, diagrams, graphics, logos, etc.) are the exclusive property of Fermob. Fermob is the exclusive owner of all intellectual property rights relating, in particular, to the catalogue and all original designs, drawings, models, patents and trademarks that it contains. It is strictly prohibited to use all or part of these elements without the prior, express authorisation of Fermob. Unauthorised use may result in penalties, in particular those stipulated by the French Intellectual Property Code concerning infringement of copyright (article L. 335-3 and following), drawings and models (article L. 521-1 and following), patents (article L. 615-1 and following) and trademarks (article L. 716-1 and following), and by the French Civil Liability Code (article 1382 and following).

PHOTO CREDITS: Stéphane Rambaud | Tom Watson | Claire Curt | Sébastien Boudot | Julie Ansiau | Maud Chalard | Delphine Chanet | Sébastien Érome | Lucas Fascini | Brigitta Wolfgang Drejer | Véronique Vedrenne | Lucas Fascini | Jean-Pierre Lemoine | Aurélie Lecuyer | Jérôme Galland | Nicolas Mathéus | Louise Carrasco

Join us :



fermob.com